

IT IS EASY TO CLEAN

It is simple and easy to clean the flooring. It blocks bacteria, impurities, water and it has excellent stain- and chemical resistance.



TIME- AND COST-EFFICIENT LAYING

Fektetés előtt pár óra alatt akklimatizálódik a helyiség hőmérsékletéhez, nem kell párazáró fólia, vagy akár lépcsőszaj csökkentő alátét lemez, gyorsan és egyszerűen fektethető, ragasztó használata nélkül. Fektethető régi burkolatra is.

IT IS THE BEST SOLUTION EVEN IN CASE OF UNDERFLOOR HEATING

The flooring is compatible with underfloor heating systems as it has a low thermal resistance.

ENVIRONMENTAL-FRIENDLY

100% recyclable, it is made from environmental-friendly materials, its usage results in a lower ecological footprint.eredményez.

COMFORTABLE

It is a warm floorcovering, so it provides a pleasant walking comfort.

EXCELLENT DIMENSIONAL STABILITY

It resists both cold and warm temperatures, and the changes in humidity do not cause any problem either. The degree of dilatation is extremely low, and there is no risk of mold or pests due to the tight clicking of the planks.

100% WATER RESISTANT

Spilling water or frequent mopping do not mean a problem; it can be used in any office-, school- and business room or in any room related to catering and reception without any trouble.

Thickness
5.0 mm
Wear layer
0.55 mm

10
pcs/box

33 42



100%
WATER
RESISTANT



PHTHALATE
FREE



GRABO PLANKIT SPC Click

DESCRIPTION		
STRUCTURE	SPC Click design flooring	
DIMENSIONS	EN ISO 24341	177,8x1219,2 mm
	EN ISO 24341	7x48 inch
THICKNESS	EN ISO 24346	5.0 mm
WEAR LAYER THICKNESS	EN ISO 24340	0.55 mm
WEIGHT	EN ISO 23997	9.9 kg/m ²
CLASSIFICATION		
BINDER CONTENT	EN ISO 10582	Type I.
EUROPEAN CLASSIFICATION	EN ISO 10582	Class: 33/42
RESIDUAL INDENTATION REQUIREMENT	EN ISO 24343	max. 0.1 mm
RESIDUAL INDENTATION VALUE MEASURED	EN ISO 24343	max. 0.01 mm
DIMENSIONAL STABILITY	EN ISO 23999	max. 0.1 %
CURLING	EN ISO 23999	max. 2.0 mm
PERFORMANCE		
ABRASION GROUP	MSZ EN 660-2	Group: T
FIRE RESISTANCE	EN 13501-1	Class: Bfl-s1
SLIP RESISTANCE	EN 13893	DS
	DIN 51130	R10
LIGHT FASTNESS	EN ISO 105-B02	Grade 6
CHEMICAL RESISTANCE	EN ISO 26987	✓
ENVIRONMENTAL PERFORMANCE	free of solvents and phthalates	
SURFACE TREATMENT	iGuard PUR Surface	
PCP CONTENT	EN 12673	does not contain
FORMALDEHYDE EMISSION	ENV 717-1	E1 (no emission)
VOC	ISO 16000	✓
THERMAL RESISTANCE REQUIREMENT	EN 1264-3	max 0,15 (m ² K) / W
THERMAL RESISTANCE VALUE MEASURED	EN 1264-3	0,0139 (m ² K) / W

GRABOPLAST
FLOOR COVERING MANUFACTURERS LTD.
H-9023 Győr, Fehérvári út. 16/b. Telefon: (+36) 96 506-100
www.graboplast.com



2020/01/23

f www.facebook.com/graboplast

GRABO
CLICK
SPC
FLOORING



PLANKIT
SPC

THE MOST DURABLE
VINYL FLOORING

PLANKIT SPC



EXTREMELY LOW RESIDUAL INDENTATION

Furnitures do not leave a mark even after a long time; the product has an incredible castor chair resistance! The wear layer of 0.55 mm thickness is reinforced also with ceramic beads, so the scratch- and abrasion resistance of the product is outstanding.



PLANKIT SPC

THE MOST DURABLE VINYL FLOORING

The PlankIT SPC flooring of Graboplast is the best possible choice for spaces exposed to higher demanding use!


One major advantage of the PlankIT SPC flooring is its solid core, which – due to its composition (Stone Polymer Composite) – is much more durable and stable than any other conventional vinyl and click floorings. It has a realistic pattern of wood paneling and an excellent light fastness. **It can be used in office-, school- and business rooms or in rooms related to catering and reception, exposed to more demanding use** and can be laid down even in case of minor floor roughness. The flooring can also be used on existing hard surfaces, while **laying is easy and cost-efficient** with the click system. As it is made from environmental-friendly materials, it is 100% recyclable, and harmless to the environment and to human life (it even has a Blue Angel qualification).



WALDER



BOLTON

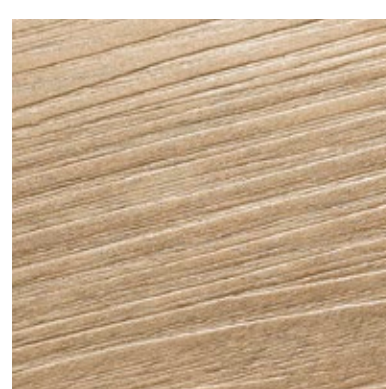

LANNISTER



BRONN



DAVOS




STARK

PLANKIT SPC AND VAPOREX T SYSTEM OFFER

In every room where the moisture content of the floor requires a special solution, the Vaporex T moisture-resistant membrane provides protection and shortens the time length of installation if necessary. The PlankIT SPC preserves its excellent castor chair resistance even when the Vaporex T membrane is applied under it. The system has an acoustic property of 20 dB.



GRABOPROFIL HARD FOAM SKIRTING

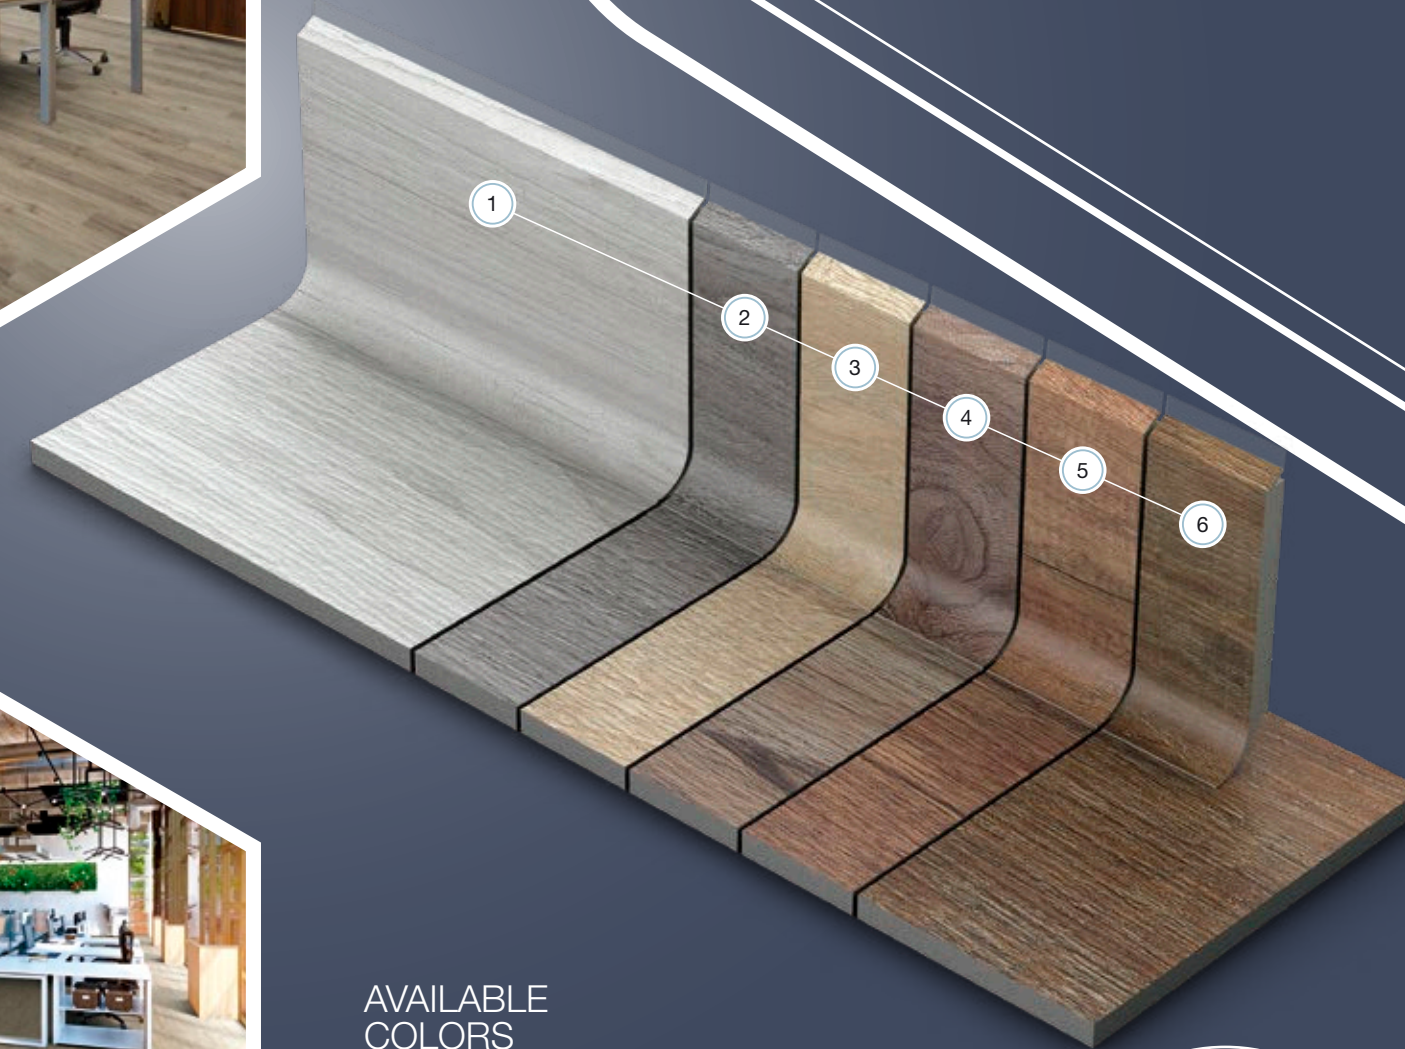

AVAILABLE COLORS

- 1 Walder 2109
- 2 Bolton 2108
- 3 Lannister 2102

- 4 Bronn 2103
- 5 Davos 2104
- 6 Stark 2112

Parameters:
Length: 2,2 m
Height: 60 mm
Packing:
20 pcs/box



AESTHETIC DESIGN



LONG LIFETIME



EASY TO CLEAN



SIMPLE AND QUICK INSTALLATION