

Twin

TECHNOLOGY AT THE SERVICE OF SUSTAINABILITY


The technology adopted in the composition of Twin allows to optimize the use of forest resources involved in the production of flooring, guaranteeing the aesthetic quality and the technical characteristics of a solid oak floor.

The ideal product for large amounts exclusively in AB quality.



VENEER OAK
Sheet of veneer European oak, AB quality

Solid European oak




PLYWOOD
Plywood



Hygienic



High resistance



E1 (VOC) Emissions classification



CARB2 TSCA Title VI



Fire resistance class (C fl - s 1)

TECHNICAL INFORMATION

Thickness 15 mm - 14 mm

T&G

100% AB quality


Width 185 - 205 - 220 mm



MADE IN ITALY

PROCESSED FOR HIGH-LEVEL RESULTS

Twin is composed of a surface layer of European veneer oak of high aesthetic quality, a central body of solid oak and a plywood base. High durability and excellent resistance to climatic variations is guaranteed by a painted finishing resistant to high footfall and a solid and uniform gluing.

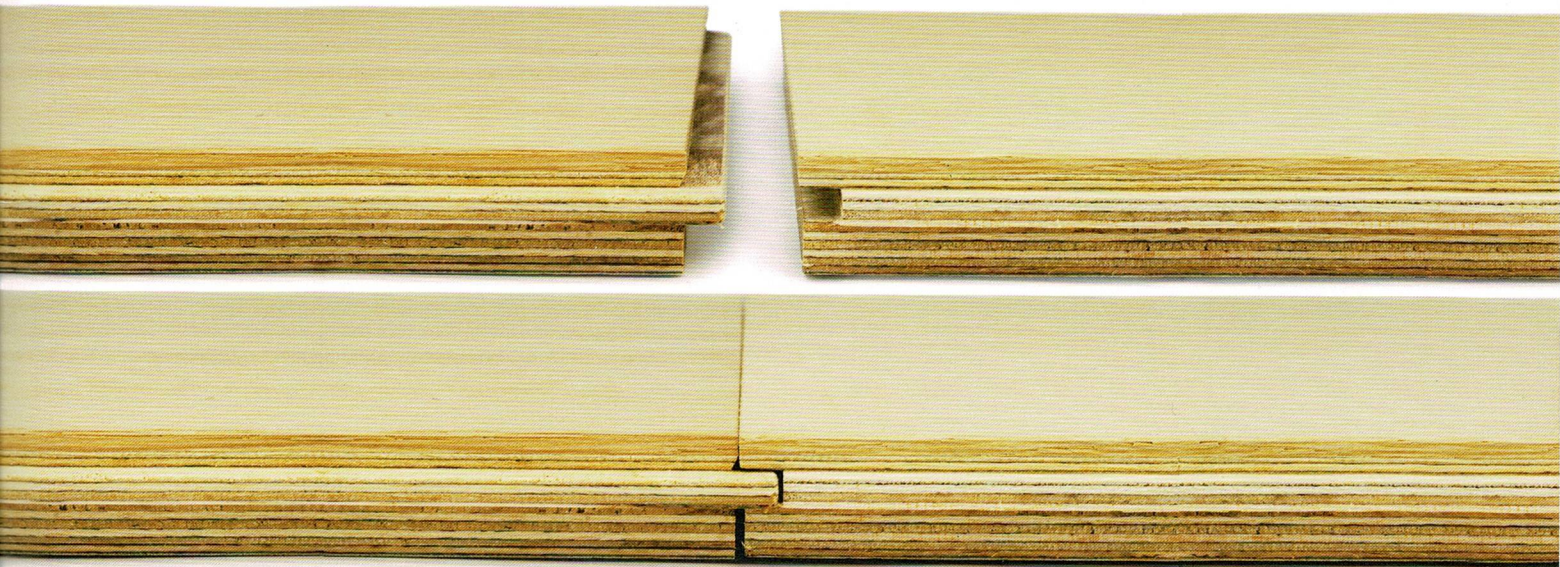

OUR COLORS

